

**TECHNICAL DATA SHEET - 122mm Black Composite Heelguard Slotted Grate (Male/Female Locking) - Class D**




**Hydro Black Composite Heelguard Slotted Grate (Male/Female Interlocking)**

Certified to load class D 210kN (AS3996), point load approximately 8,000kgs.  
 Compliant for wheelchair & walking cane safety (AS1428.2 - Clause 9).  
 Compliant for bicycle tyre penetration resistance (AS3996 - Clause 3.3.6).

Intake area of 11,221mm<sup>2</sup> per half metre grate.  
 Hydro black composite heelguard slotted grates are corrosion resistant, and compatible with MEA Supreme/Solution Z/S1000 channel systems & inline sumps.  
 Installation must be in accordance with the installation instructions from the manufacturer.  
 Total width of grate is 122mm.

**Locking Mechanisms**

Standard locking system offer securement to channel units or inline sumps.

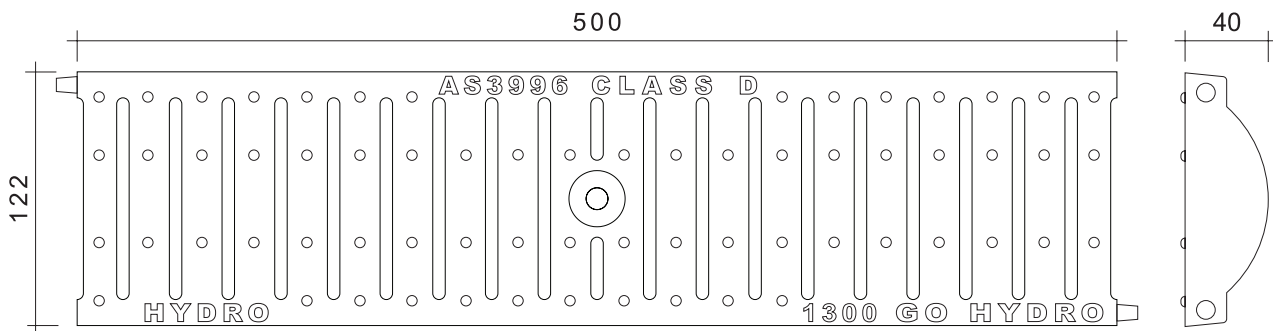

PRODUCT SPECIFICATION				
DESCRIPTION	MATERIAL	LENGTH	PRODUCT CODE	WEIGHT (KG)
122mm Black Composite Heelguard Slotted Grate 0.5m	Composite	500mm	147214MF	1.6
Standard Locking Mechanism - Z/S1000 Channels	Stainless Steel	N/A	147110	0.2

TOLL FREE: 1300 GO HYDRO | [hydrocp.com.au](http://hydrocp.com.au)

[DRAIN](#) • [STAINLESS](#) • [DIAMOND TOOLS](#) • [GRATES & FRAMES](#) • [CABLEPIT](#) • [COVERS](#)