


TECHNICAL DATA SHEET - 222mm Ductile Iron Slotted Grate STARFIX - Class E

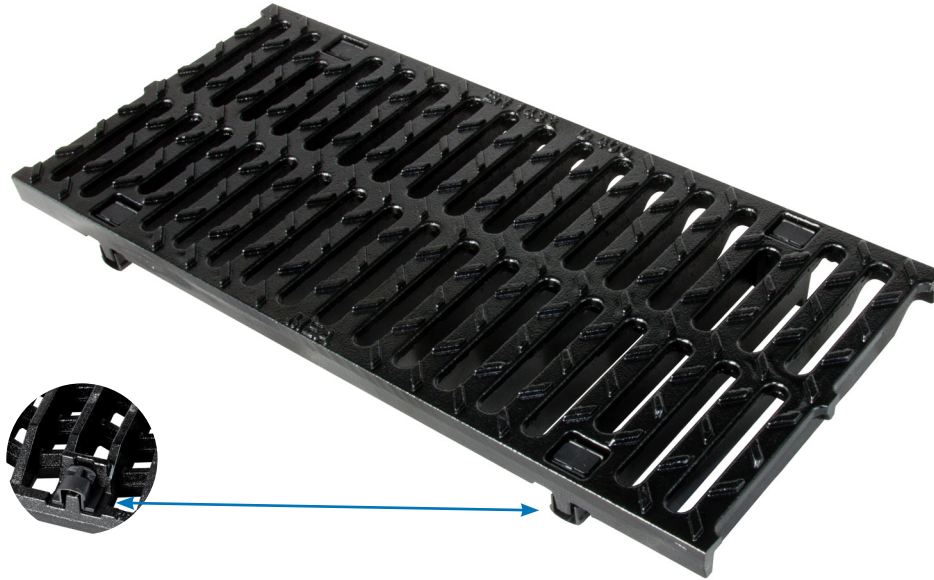


Hydro Ductile Iron Slotted Grate - Starfix

Load class E 400kN (AS3996), point load approximately 13,700kgs.
 Compliant for wheelchair & walking cane safety (AS1428.2 - Clause 9).
 Compliant for bicycle tyre penetration resistance (AS3996 - Clause 3.3.6).

Intake area of approximately 37,671mm² per half metre of grate.
 Grates compatible with **Mearin Plus/Expert 200** channel system.
 Manufactured from ductile iron with KTL coating.
 Installation must be in accordance with the installation instructions from the manufacturer.
 Total width of grate is 222mm.

Locking Mechanisms

Starfix locking system offers securement to channel units or inline sumps.

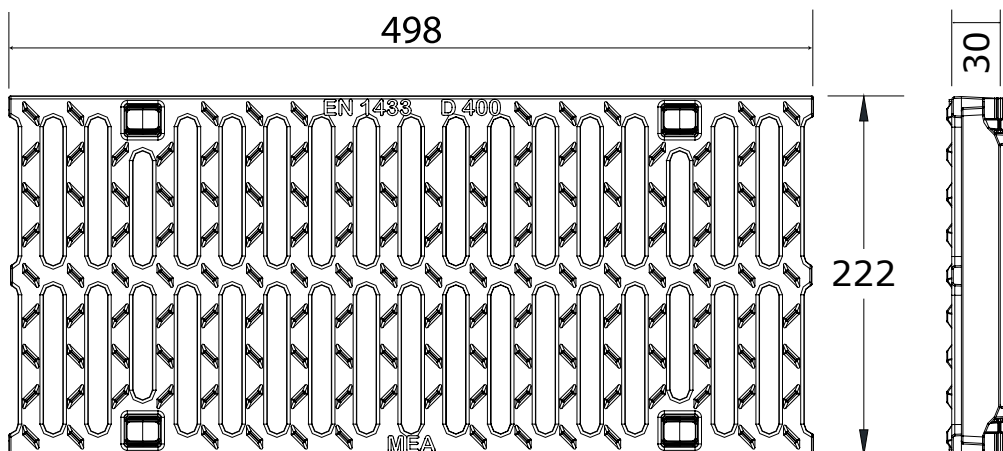

PRODUCT SPECIFICATION

DESCRIPTION	MATERIAL	LENGTH	PRODUCT CODE	WEIGHT (KG)
222mm Ductile Iron Slotted Grate - Starfix	Ductile Iron	498mm	140178	8.5

TOLL FREE: 1300 GO HYDRO | hydrocp.com.au

[DRAIN](#) • [STAINLESS](#) • [DIAMOND TOOLS](#) • [GRATES & FRAMES](#) • [CABLEPIT](#) • [COVERS](#)