

TECHNICAL DATA SHEET - 122mm Black Plastic Heelguard Slotted Grate Clipfix - Class D




Hydro Black Plastic Heelguard Slotted Grate Clipfix

Load class D 210kN (AS3996), point load approximately 8,000kgs.
 Compliant for wheelchair & walking cane safety (AS1428.2 - Clause 9).
 Compliant for bicycle tyre penetration resistance (AS3996 - Clause 3.3.6).

Intake area of 11,282mm² per half metre grate.
 Grate is compatible with Hydro's Meafluid 100 GRP and LZ/LS/Z/S1000 polymer concrete channel systems.
 Installation must be in accordance with the installation instructions from the manufacturer.
 Total width of grate is 122mm.

Locking Mechanisms

Hydro's black plastic heelguard slotted grate comes with non-bolted Clipfix, which simply clicks into the edge rail of the channels.

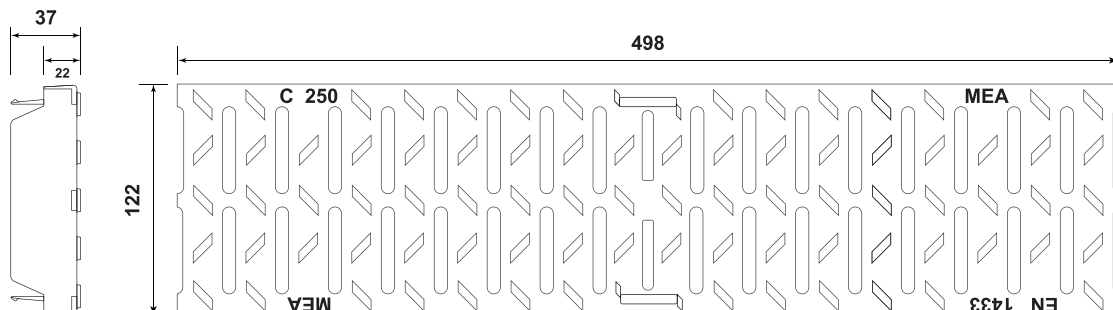

PRODUCT SPECIFICATION				
DESCRIPTION	MATERIAL	LENGTH	PRODUCT CODE	WEIGHT (KG)
122mm Black Plastic Heelguard Slotted Grate 0.5m	Plastic	498mm	152421	1.0

TOLL FREE: 1300 GO HYDRO | hydrocp.com.au

[DRAIN](#) • [STAINLESS](#) • [DIAMOND TOOLS](#) • [GRATES & FRAMES](#) • [CABLEPIT](#) • [COVERS](#)