


TECHNICAL DATA SHEET - 123mm Galvanised Steel Longitudinal Heelguard Grate CLIPFIX - Class B

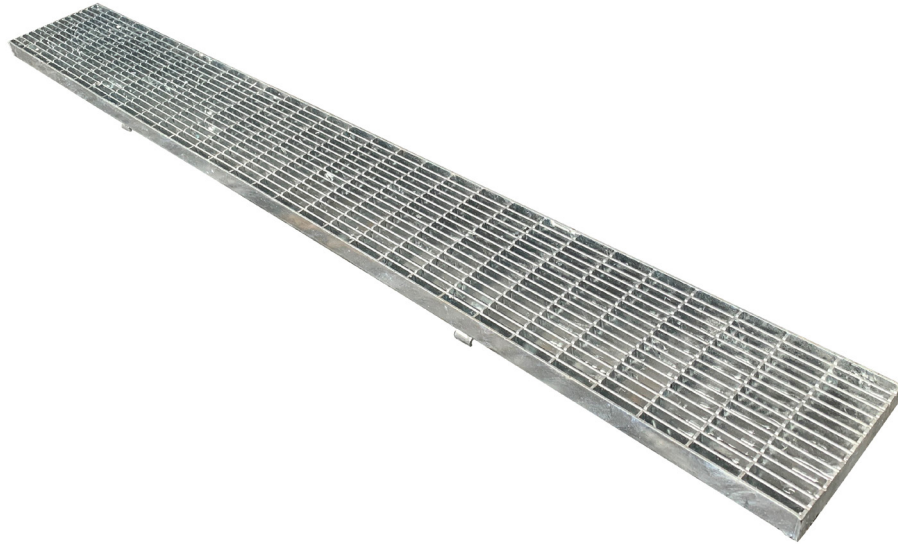



Hydro Galvanised Steel Longitudinal Heelguard Grate

80KN, point load approximately 2,670Kgs.
 Certified to Load Class B80 (AS3996).
 Compliant for surface openings in pedestrian areas (AS3996).
 Certified for Slip resistance for Wet Pendulum Test (AS4586:P5).
 Compliant for wheelchair and walking cane safety (AS1428.2- Clause 9).
 Compliant for bicycle tyre penetration resistance (AS3996- Clause 3.3.6).

Intake area of approximately 84,240mm² per metre of grate.
 Grates compatible with MEA Supreme/Solution LZ/ Z1000, LS/S1000 channel systems & inline sumps and MEAFLUID100 channels.
 Manufactured from mild steel (hot dipped galvanised).
 Installation must be in accordance with the installation instructions from the manufacturer.
 Total width of grate is 123mm.

Locking Mechanisms

Clipfix locking system offer securement to channel units or inline sumps.

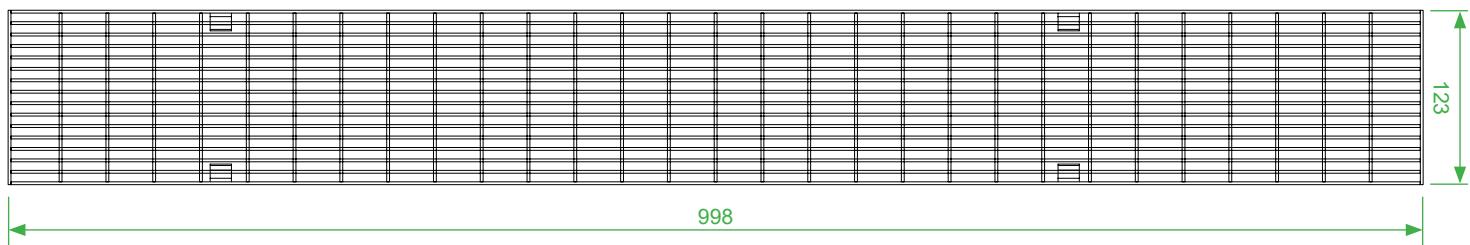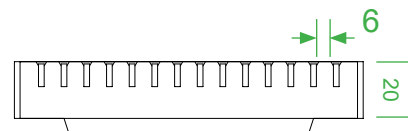

| PRODUCT SPECIFICATION | | | | |
|---|------------------|--------|--------------|-------------|
| DESCRIPTION | MATERIAL | LENGTH | PRODUCT CODE | WEIGHT (KG) |
| 123mm Galvanised Steel Longitudinal Heelguard Grate CLIPFIX | Galvanised Steel | 998mm | 152503HG | 4.9 |