

**TECHNICAL DATA SHEET - 172mm Ductile Iron Longitudinal Heelguard Clipfix Grate - Class D**




**Hydro Ductile Iron Longitudinal Heelguard Grate - Clipfix**

Load class D 210kN (AS3996), point load approximately 8,000kgs.  
 Compliant for wheelchair & walking cane safety (AS1428.2 - Clause 9).  
 Compliant for bicycle tyre penetration resistance (AS3996 - Clause 3.3.6).

Intake area of 27,860mm<sup>2</sup> per half metre of grate.  
 Grates compatible with **MEAFUID 150** channel system & inline sumps.  
 Manufactured from ductile iron with KTL coating,  
 Installation must be in accordance with the installation instructions from the manufacturer.  
 Total width of grate is 172mm.

**Locking Mechanisms**

Clipfix locking system offers securement to channel units or inline sumps.

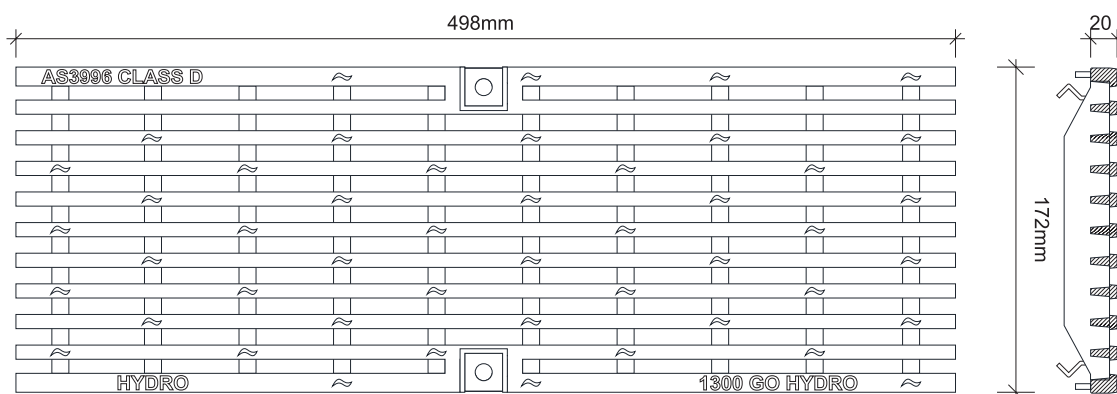

PRODUCT SPECIFICATION				
DESCRIPTION	MATERIAL	LENGTH	PRODUCT CODE	WEIGHT (KG)
172mm Ductile Iron Longitudinal Heelguard Grate	Ductile Iron	498mm	712586	4.2

TOLL FREE: **1300 GO HYDRO** | [hydrocp.com.au](http://hydrocp.com.au)

[DRAIN](#) • [STAINLESS](#) • [DIAMOND TOOLS](#) • [GRATES & FRAMES](#) • [CABLEPIT](#) • [COVERS](#)