



**TECHNICAL DATA SHEET - 172mm Galvanised Steel Longitudinal Heelguard Grate CLIPFIX - Class D**

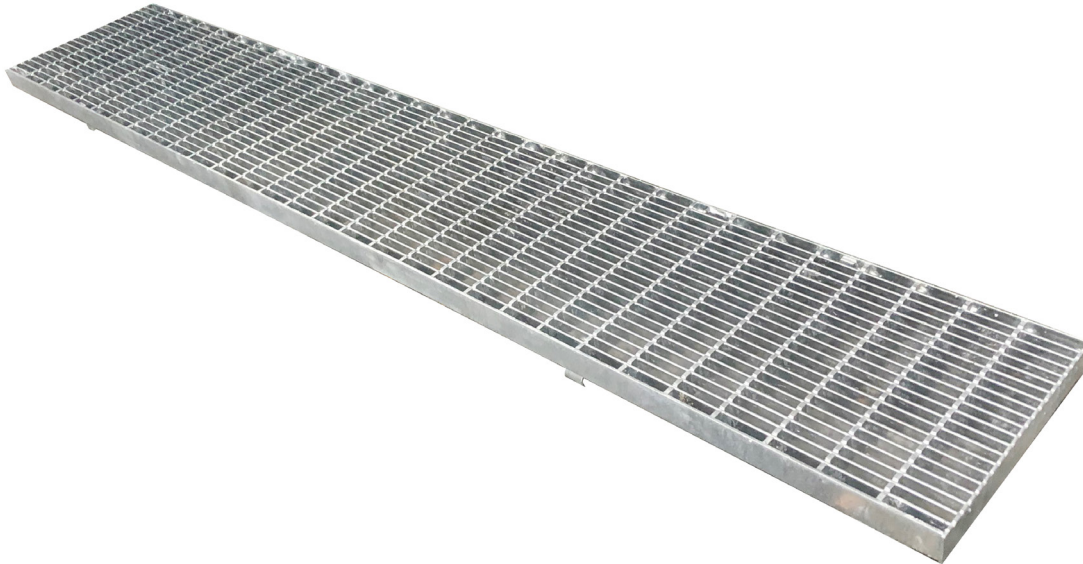

**Hydro Galvanised Steel Longitudinal Heelguard Grate**


210KN, point load approximately 8,000Kgs.  
 Certified to Load Class D210 (AS3996).  
 Compliant for surface openings in pedestrian areas (AS3996).  
 Certified for Slip resistance for Wet Pendulum Test (AS4586:P5).  
 Compliant for wheelchair and walking cane safety (AS1428.2- Clause 9).  
 Compliant for bicycle tyre penetration resistance (AS3996- Clause 3.3.6).

Intake area of approximately 113,400mm<sup>2</sup> per meter of grate.  
 Grates compatible with MEA Supreme/Solution AZ1500 & MEAFLUID 150 channels.  
 Manufactured from mild steel (hot dipped galvanised).  
 Installation must be in accordance with the installation instructions from the manufacturer.  
 Total width of grate is 172mm.

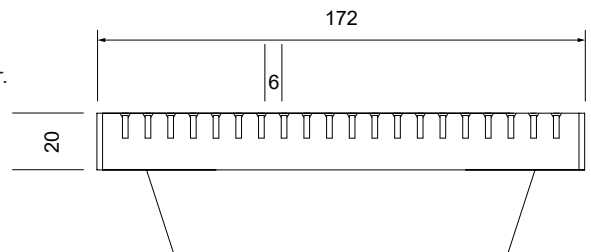

**Locking Mechanisms**

Clipfix locking system offer securement to channel units or inline sumps.

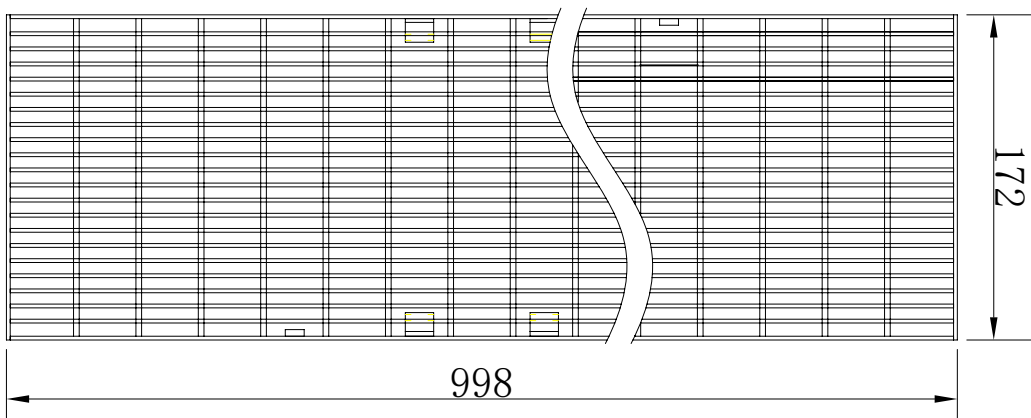

PRODUCT SPECIFICATION				
DESCRIPTION	MATERIAL	LENGTH	PRODUCT CODE	WEIGHT (KG)
172mm Galvanised Steel Longitudinal Heelguard Grate CLIPFIX	Galvanised Steel	998mm	712834HG	7.6